

# A truly affordable 2 & 4 line call-in digital dictation system!



see specification, page 2 →

## SIMPLY DIAL & DICTATE

from  
ANY PHONE, ANYWHERE, ANYTIME!

Apptec Corporation  
*A developer of next generation technology!*

© Copyright 2007 Apptec Corporation All Rights Reserved



Technology by Apptec

# Specification

## PRODUCT MODELS

DT-102-USB 2-line system  
DT-104-USB 4-line system

## HARDWARE SYSTEM REQUIREMENTS

Pentium II or equivalent or better  
Interface: USB 1.1 or 2.0, USB cable included.  
Ram: 1 MB or greater  
Hard Disk: 1 GB or greater

## OPERATING SYSTEMS

Windows 2000, XP, VISTA

## TELEPHONE LINES

Analog phone lines connected with standard RJ-11 plugs, phone cords included.

## USERS

100 users, each with individual custom settings

## DICTIONATION FILES

Dictation file names include user identity, date and time of dictation, reference number (up to 15 digits), priority indication, and file format extension. Each user can choose their own destination for their dictation files.

## FTP FILE TRANSFER via FTPMagic

Transfer files automatically to up to 25 FTP sites.

## TO NE DETECTION

DTMF digits: 0 - 9, \*, #, A, B, C, D  
Dynamic range: -38 dBm to 0 dBm  
Minimum tone detection: 40 ms

## HANGUP DETECTION

Line Voltage goes below 2 volts for a settable period of time between 1 ms and 999 ms, or user presses DTMF representing the hangup function.

## AUDIO SIGNAL

Receive range: -68 dBm to +3 dBm  
Record gain control: +20 to -20 dB  
AGC (automatic gain control) mode  
Frequency Response: 300 - 3400 Hz (+/- 3 dB)

## AUDIO ENCODING

WAV (u-Law), 64 kb/s, 8 bits at 8 KHz, mono  
VOX, 32 kb/s, 8 bits at 4 KHz, mono

## RING DETECTION

30 Vrms (min), 16 to 68 Hz  
REN (ringer equivalence number): 2

## SAFETY AND CERTIFICATIONS

Lightning: Level 4  
Certificates: FCC & CE

## TECHNICAL SPECIFICATIONS:

Length x Width x Height:  
6.75" x 4.9" x 1.2" (17cm x 12.5 cm x 3cm)

## POWER REQUIREMENTS (from USB port)

+5 VDC @ 400 mA, 2 W maximum

## ENVIRONMENTAL CONDITIONS


Operating/Storage Temperature: 0 C to +55 C  
Humidity: 8% to 90% non-condensing

## HARDWARE LIMITED WARRANTY

Parts and labor for 1 year from date of purchase. See the Product Manual for details.


## ACTIVITY MONITOR

View user activity for each line.

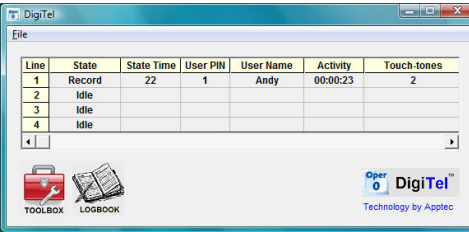

### Including:


- Line State (record, play, etc.)
- State Time (time in current state)
- User PIN
- User Name
- Activity (time in record and position in play)
- Touch-tones (most recent 13 entered)

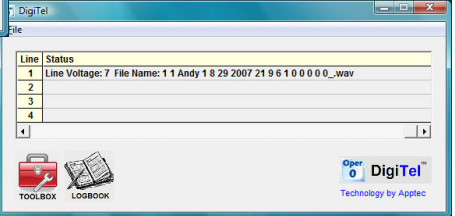


### And Including:

Line Status (line voltage and file name)



## TOOLBOX

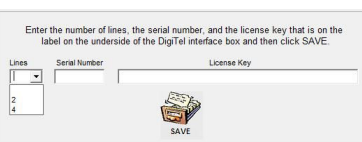

Enter the number of lines, serial number, and license key to activate your DigiTel.

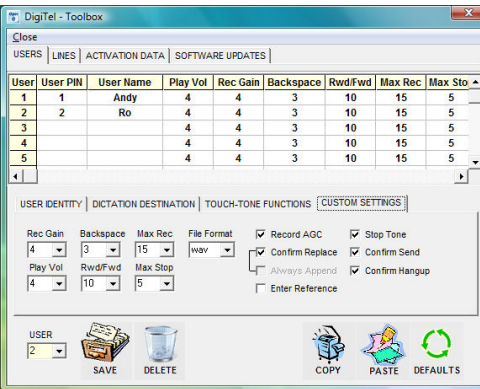


Enroll up to 100 users, individually specify their dictation destination, touch-tone functions, and custom settings.

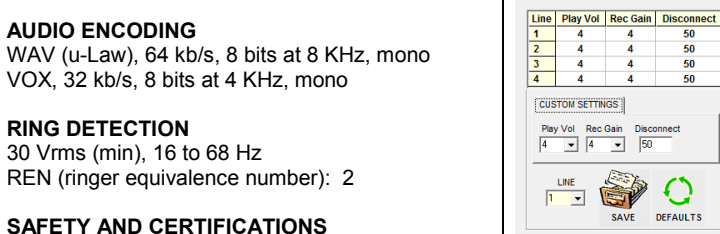

Specify each line's custom settings.

Check for software updates.



## LOGBOOKS

View daily dictation activity including dictation destination, file name, size, length, time sent, and touch-tones entered during that dictation. Activity is comma delimited so it can be parsed into a spreadsheet or database with ease.

