


HOW TO UPDATE FIRMWARE ON THE FTR REPORTERDECK™ 2


IMPORTANT NOTE: Prior to updating the firmware, you must ensure that ALL recordings on the RD2 are archived. Failure to do so **could** result in loss of recordings and/or improper operation of the unit.

<u>STEP 1:</u>	<u>STEP 2:</u>
<p>NOTE: The entire unit must be set-up, including the break-out box and connection cable.</p>  <p>Power ON the RD2</p>	<p>Insert your firmware CD</p>  <p>Once the CD is pulled into the unit, you must POWER OFF the RD-2.</p>

STEP 3:

Please refer to the image on the following page related to the steps below.

- (a) Re-start (Power ON) the RD-2.
- (b) When the unit is powered on, you should see a dialog box stating **“Update media was found, continue?”**
- (c) Press “Yes” using the F1 key.
- (d) A message, **“System update, do not power off”** appears on the VIEW screen. Do not power off the unit during the update process.
- (e) The firmware update should take approximately 3 minutes to install from the CD. Once completed, a message **“Update Succeeded”** will be displayed on the VIEW screen. Press “OK” using the F5 key.
- (f) Once the F5 key is pressed, the RD-2 will re-start itself automatically.

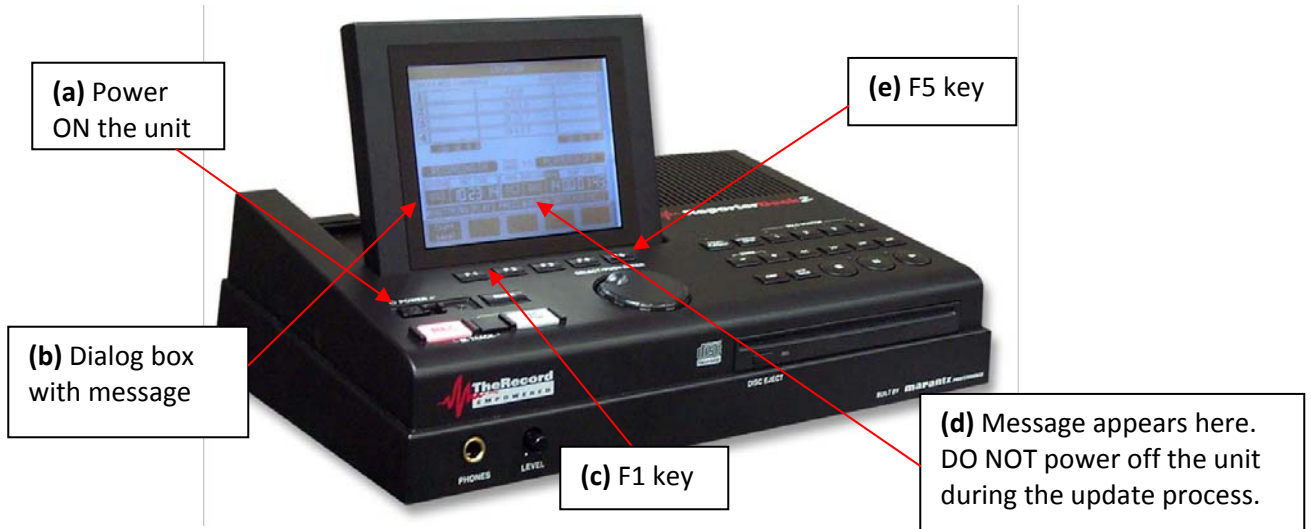

STEP 4:

When the unit has re-started, check that the update has successfully installed through the following steps (refer to image below):

- (a) Press the “menu” or F5 key.
- (b) The setup menu will appear. Using the Jog Dial, go to: Set Up → System
- (c) Scroll down to “Version” and you should see the version number of the firmware just installed. Ensure that it is version 1.04.

